



Tiger™ Bi-Directional

POWER & VERSATILITY

Maximize your productivity with Tiger's Bi-Directional attachments for the New Holland TV Series of tractors.

From the extreme duty of the Saber Boom Mower to the highly productive Triple Flail mowing system, Tiger has the attachments designed for all seasons.



TRANSPORT POSITION

Move safely and easily as flails go vertical with travel locks.



FLAIL MOWER CONTROLS

Electric solenoid operated non-restrictive, starter lockout-standard



BOOM MOWER ELECTRONIC JOYSTICK

Multi-function joystick with electric starter lockout.



DURABILITY INNOVATION

COMMITMENT

Accessories



DITCHER

22" diameter cutting width



SAW BLADE

48" saw blade diameter



50 INCH ROTARY HEAD

With hydraulic safety shield.



SWEEPER

10' or 12' broom width




SNOWBLOWER

110" width

Boom Specifications

	BENGAL	BENGAL XB	SABER
A. Reach Out	21.4'	23.7'	24.8'
B. Reach Out at Max. Down	12.9'	14.1'	14.0'
C. Reach Down	12.8'	14.8'	13.8'
D. Reach Up	18.9'	20.7'	22.5'
E. Reach Out at Max. Up	8.4'	9.8'	11.2'
F. Reach Minimum	6.1'	6.1'	7.0'
G. Mainframe To Ground Level*	1.0'	1.0'	1.1'

*ALL DIMENSIONS BASED ON 50" ROTARY HEAD

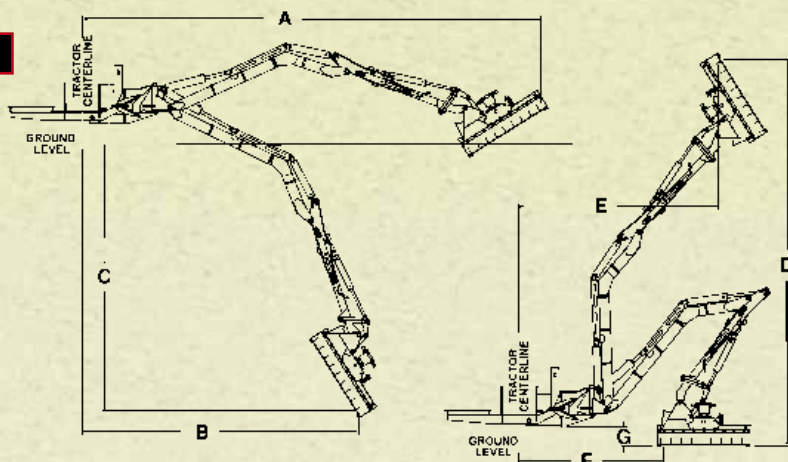

Mower Specifications

	BENGAL				SABER		TRIPLE FLAIL
	Rotary		Flails		Rotary	Flail	
MODEL NO.	TRB-50C	TRB-60C	TBF-50C	TBF-63C	SBR-50C	SBF-50C	T3F-282C
Material	up to 6"	up to 5"	up to 3"	up to 2"	up to 8"	up to 4"	up to 2"
Cutter Width	50"	60"	50"	63"	50"	50"	21' 6"
Cutter Assembly	Offset Disc -one piece-	Blade Bar 1 1/4" Thick T-1	61" Knife Swing	47" Knife Swing	Blade Bar 1 1/2" Thick T-1	56" Knife Swing Circumference	58 1/2" Knife Swing Circumference
Cutter Height	-	-	Adjustable up to 6"	Adjustable up to 6"	-	Adjustable up to 6"	Adjustable up to 6"
Knife Option							
Brush	5/8"x5"x17.125"	5/8"x5"x17.125"	24 Cast, 33 oz.	64-All Purpose	3/4"x6"x15.25"	18 Cast 54.4 oz.	424 Brush/Std.
Grass	5/8"x5"x17.125"	5/8"x5"x17.125"	48 All Purpose	32-Smooth Cut			152 Smooth Cut Grass
Max HP of Motor Output @ Rated Pressure	116 HP	116 HP	81.3 HP	81.3 HP	116 HP	116 HP	81.3 HP

Safety Standard - Meets all applicable ANSI/SAE J1001 test standards
US Patents - US D562,3575



Tiger Mowers LLC
Sioux Falls, South Dakota
800.843.6849

www.tigermowers.com
An Alamo® Group Company

Specifications are subject to change without notice.
Optional equipment may be shown.